

# Inverter Single Split 變頻淨冷掛牆分體式 YN Series

Made in Thailand  
泰國製造



## FUNCTIONS

### ENERGY SAVING



### AIR FLOW



### CLEAN OPERATION & FILTER



### COMFORT & CONVENIENCE



### OTHERS



Grade 1 級


## SPECIFICATIONS

		YN SERIES				
		SRK10YN-S7	SRK13YN-S7	SRK18YN-S7		
室內機	Indoor Unit					
室外機	Outdoor Unit					
電源	Power Source (電壓Voltage/頻率Frequency/相位Phase)	1Phase, 220-240V, 50Hz				
製冷能力	Cooling Capacity	製冷 Cooling	2.5	3.2		
			Btu/h	8,530	10,910	
耗電量	Power consumption	0.77	1.00	1.64		
能源效率值	COP	3.25	3.20	3.05		
運行電流	Inrush current	3.9 / 7.5	4.9 / 7.5	7.8 / 12.5		
室內機	Indoor Unit	氣流速度 Airflow rate (Hi/Me/Lo)	m <sup>3</sup> /min	10.1 / 7.3 / 4.2	9.5 / 6.8 / 4.2	10.1 / 7.2 / 3.8
		聲壓級 Sound pressure level (Hi/Me/Lo)	dB(A)	43 / 36 / 24	44 / 37 / 25	49 / 39 / 25
		外尺寸 Exterior dimensions (高Hx闊Wx深D)	mm	262 x 769 x 210		
		淨重 Netweight	kg	7		
室外機	Outdoor Unit	氣流速度 Airflow rate (Hi/Me/Lo)	m <sup>3</sup> /min	26	25	35
		聲壓級 Sound pressure level (Hi/Me/Lo)	dB(A)	47	49	55
		外尺寸 Exterior dimensions (高Hx闊Wx深D)	mm	540 x 645(+57 <sup>φ</sup> ) x 275	540 x 645(+57 <sup>φ</sup> ) x 275	595 x 780(+62 <sup>φ</sup> ) x 290
		淨重 Netweight	kg	25	27	39
雪種	Refrigerant	種類 Type		R410A		
		量 Charge amount	kg	0.65 (10m)	0.75 (15m)	1.20 (15m)
配管尺寸	Piping size (液態Liquid/氣態Gas)	mm	φ6.35 / φ9.52			
雪種配管長度 (單向)	Refrigerant line (one way) length	m	Max. 15			
垂直高度差距	Vertical height differences	m	Max.10 / Max.10			
室外機運作溫度	Outdoor operating temperature range	°c	21-43			

註: - 上述規格如有變更, 恕不另行通知。  
- 製冷能力以kW為計算標準。  
# 雪種配管接口位置

## Inverter


### REFRIGERANT PIPE LENGTH

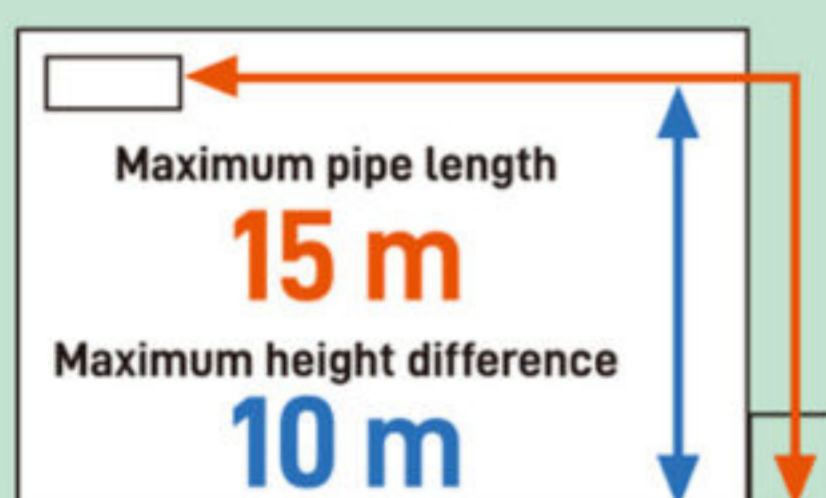

SRK10YN-S7  
SRK13YN-S7



SRK10YN-S7  
SRK13YN-S7

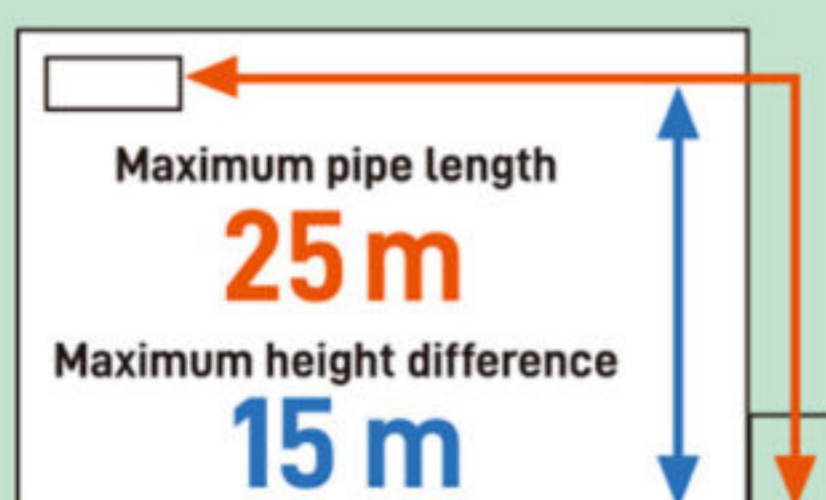

SRK18YN-S7



SRK18YN-S7

